

Category 6 U/UTP EuroClass Cca Cables

Datasheet: GD104132v6




APPLICATION

Leviton Category 6 U/UTP cables exceed Category 6 performance standards. They are rated to 250MHz and are suitable for use in all Class E structured wiring cable systems. Category 6 U/UTP cables support Gigabit Ethernet, Power over Ethernet, voice, and broadband video transmissions at frequencies up to 250MHz.

FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 unshielded twisted pairs cabled together
- Central separator for increased internal crosstalk performance
- HFFR-LS* jacket enables the cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass Cca
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors
- Designed and manufactured in a carbon neutral facility in the UK
- Delivered in 100% recyclable packaging

* Halogen Free Flame Retardant – Low Smoke

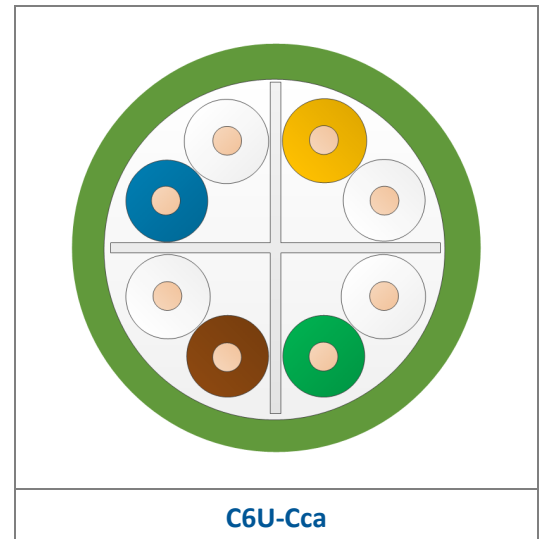

STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
 - ISO/IEC 11801 Class E, IEC 61156-5
 - EN50173-1 and EN 50288-6-1
 - ANSI/TIA 586.2-D
- Supports Gigabit Ethernet
- Recommended for PoE standards:
 - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
 - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
 - IEEE 802.3bt PoE Type 3 (60 Watts)
 - IEEE 802.3bt PoE Type 4 (90 Watts)
 - Cisco UPoE (60 Watts)
 - Cisco UPoE+ (90 Watts)
 - Power over HDBaseT™ PoH (95 Watts)

Category 6 U/UTP EuroClass Cca Cables

Datasheet: GD104132v6



REACTION TO FIRE

CHARACTERISTIC	IEC STANDARD	EN STANDARD	CPR RATING
Classification / EuroClass	-	EN 13501-6	Cca s1a d1 a1
Single Cable Flame Rating	IEC 60332-1-2	EN 60332-1-2	Pass
Smoke Emission	IEC 61034	EN 61034	Pass
Acid Gas Emission	IEC 60754	EN 60754	Pass

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω/100m	16 Ω/100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	505nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @100MHz	30nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Transverse Conversion Loss (TCL)	≥50-10log(f)dB	61dB @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250
Insertion Loss (dB/100m) max	Standard	2.0	3.8	6.0	8.5	19.8	29.0	32.8
NEXT (dB) min	Standard	74.3	65.3	59.3	54.8	44.3	39.8	38.3
PSNEXT (dB) min	Standard	72.3	63.3	57.3	52.8	42.3	37.8	36.3
ACR-F (dB) min	Standard	67.8	55.8	47.8	41.8	27.8	21.8	19.8
PSACR-F (dB) min	Standard	64.8	52.8	44.8	38.8	24.8	18.8	16.8
Return Loss (dB) min	Standard	N/A	23.0	25.0	25.0	20.1	18.0	17.3

INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg	Field Test NVP Value	0.66
Segregation Class	Class B		

Category 6 U/UTP EuroClass Cca Cables

Datasheet: GD104132v6



STANDARD PACKAGING SPECIFICATIONS – REELS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Diameter x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
C6U-Cca-500GN	500	Green†	6.15	44.9	400 x 310	24.5	18
C6U-Cca-1000GN	1000	Green†	6.15	44.9	465 x 390	47.9	6

STANDARD PACKAGING SPECIFICATIONS - BOXES

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size L x W x H (mm)	Gross Weight (kg/Item)	Items Per Pallet
C6U-Cca-Rlx-305GN	305	Green†	6.15	44.9	435 x 265 x 405	14.4	21/14††

† Also available in a range of non-standard colors

†† 3 layers / 2 layers

COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated to designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty **cabling solutions.**”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.